

Included Components:


- A. 1x Slim-Grip® Tablet Holder with Support Legs (TAB001)
- B. 1x 25mm Ball-to-Ball Adapter (SP25MMPL)
- C. 1x 25mm Ball to Dual T-Tab Adapter (APRM2T)
- D. 2x Robust™ Series 3.75" Shaft Arm - 25mm (SP-RM250)
- E. 1x Cup Holder with 25mm Ball (SPRM023)

Important: Clean the application surface and make sure it is free of dirt, dust, and grease before installation.


Please take note of the pads included in SPRM023 packaging:
1 - Set of 4 Self-Adhesive Pads (SP023PAD) - Optional

If you need a replacement part, please refer to the SKU options below:
• **Tablet Holder Support Legs:** SPTAB1FT


- 1 Install Dual T-Tab Adapter**
Insert the Dual T-Tab adapter into the slot on the back of the tablet holder. Slide it upward until it clicks or feels firmly locked into place.

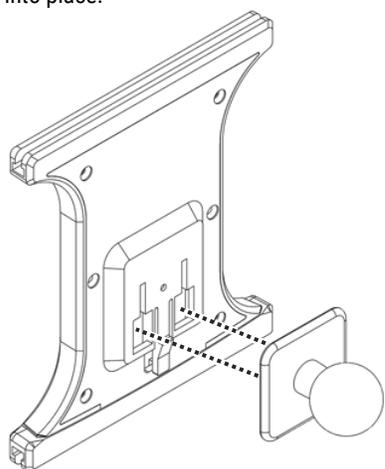


- 2 Expand the Cup Holder**
Twist the base counterclockwise to adjust it to your car's cup holder. For larger cup holders, use the included adhesive pads for a secure fit.

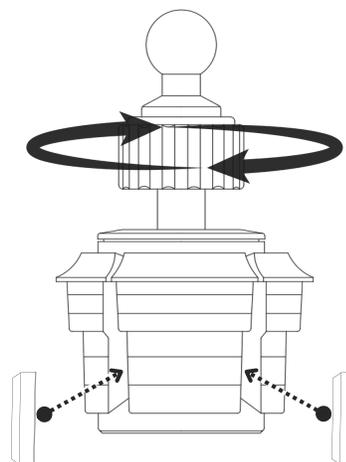

- 3 Assemble the Components**
Insert the 25mm ball-to-ball adapter between the two shafts by loosening the knobs counterclockwise. Then, secure the phone holder with adapter to the top shaft arm.

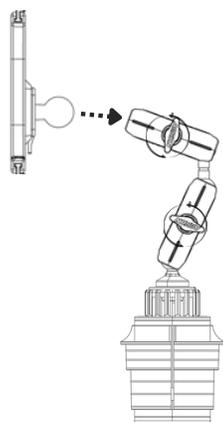

- 4 Fully Assembled**
Refer to the image below for the full assembled product.

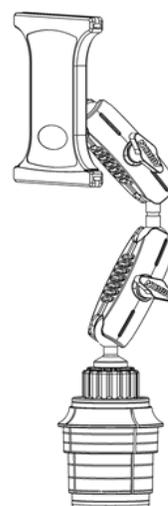

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.


Continued on page 2



Tablet Holder Installation Steps:


5 Installing the Support Legs

Select the appropriate support legs based on the size guidelines provided on page 1. Then, insert each leg into the designated support leg channel on the holder and slide it in until it fits securely.

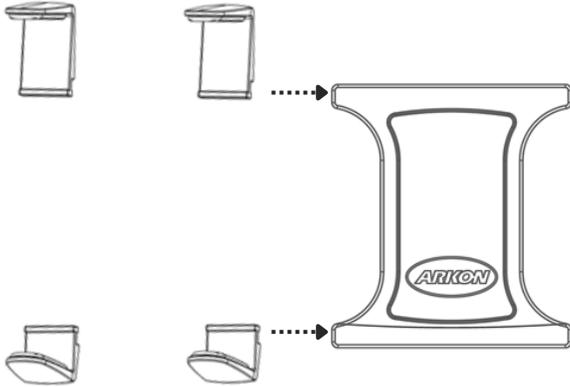


6 Extend the Spring-Load Mechanism

To extend the legs, insert one end of the tablet into the bottom support legs.

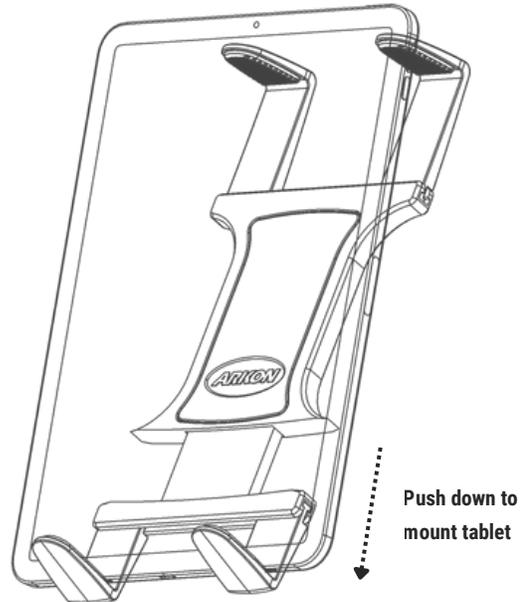


7 Install Your Tablet

With the holder's spring-loaded support legs expanded, lay the tablet flat on the holder.

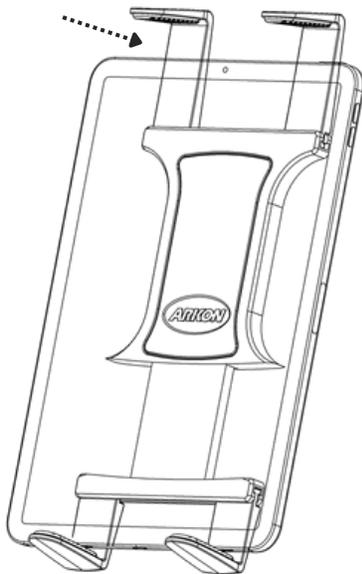

8 Secure Your Tablet

Gently release the tablet into the holder, allowing the bottom spring-loaded support legs to secure the tablet.

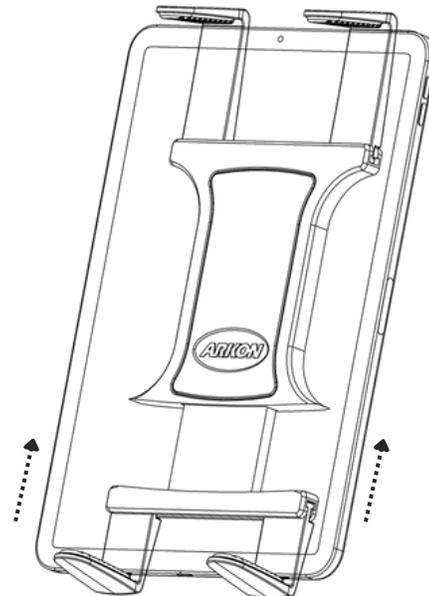

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.

